

ZELTEX


Analog Computer Elements

EFFECTIVE AUGUST, 1966

ZELTEX COMPUTER AMPLIFIERS

The Zeltex 500 Series Amplifiers have been specifically designed for operation in high speed analog computers and simulators. They use silicon semiconductors throughout and employ SOLID STATE (FET) chopper stabilization for greatest reliability. Two independent amplifiers are mounted on a single etched circuit card. Each amplifier has an overload light mounted on the front of the card, and overload indicating signals are also brought out at the rear connector. Individual chopper drive oscillators are built into each amplifier so that the only power required by the amplifiers is a single source of ±130 VDC. Internal chopper drive minimizes noise pickup at the chopper frequency and greatly reduces the complexity of installation.

Four different amplifiers are available in the Zeltex 500 Series; the economical Model 510, the more sophisticated Model 511 and high voltage versions of these two units. The basic 510 and 511 are powered from ±130 VDC and offer an output current of 30 ma at the ±100 V level. The high voltage counterparts to these units are powered from ±175 VDC and provide an output current of 50 ma at the 100 V level. Output excursions of ±150 volts peak are also available with load currents of 10 ma or less in the high voltage units. All amplifiers are unconditionally short circuit proof; amplifier output terminals can be shorted to ground, to the 100 volt reference level or to the power supply without damage.

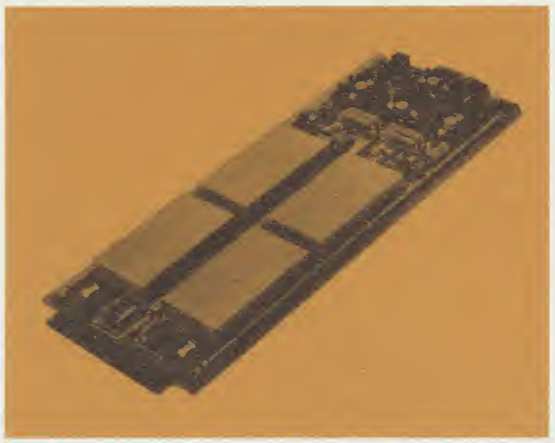

SPECIFICATIONS

	Model 510	Model 511
Output characteristics		
Power Output	30 ma @ ±100 V	30 ma @ ±100 V
Frequency for full ±100 V output	DC to 25 KHz	DC to 25 KHz
Slewing rate	15 V/μsec	15 V/μsec
Gain @ DC	10^8	10^8
Offset voltage		
Initial offset	adjustable to zero	adjustable to zero
Temperature drift	2 μV/°C	1 μV/°C
Drift @ 25°C	20 μV/day	10 μV/day
Input current		
Offset @ 25°C	50 pa	10 pa
Temperature drift	1 pa/°C	0.2 pa/°C
Dynamic characteristics		
Gain-bandwidth product	500 KHz	1 MHz
Roll off rate	–6 db/octave	–6 db/octave
Frequency response (100K inv.)	150 KHz	300 KHz
Input impedance @ DC	1 meg	1 meg
Noise, RTI	1 mv, pp	300 μv, pp
Overload recovery time	4 sec	0.03 sec
Power requirements (per channel)	±130 VDC @ 15 ma no load	±130 VDC @ 15 ma no load


NOTE:
Models 510-HV and 511-HV have performance as above except for the following:

	Model 510-HV	Model 511-HV
Power output	50 ma @ ±100 V & 10 ma @ ±150 V	50 ma @ ±100 V & 10 ma @ ±150 V
Power requirements (per channel)	±175 VDC @ 25 ma no load	±175 VDC @ 25 ma no load

ZELTEX ELECTRONIC MULTIPLIERS

The Zeltex 500 Series Multipliers are a new class of Quarter Square Multipliers which employ small solid state operational amplifiers to assist in generating the square law function. The advantage of this technique is that the errors associated with diode drift with temperature are virtually eliminated and the number of precision resistors required in forming the square law function is greatly reduced. While this is a new design approach (Pat.Pending with Zeltex), experience with over 1,000 precision multipliers in the field has proven the reliability and soundness of design.

There are three different multipliers available in the Zeltex 500 Series: the Models 502, 502A and 503. Detailed specifications on each of these are shown below. The Model 502A has the two input inverting amplifiers built-in, and it does not require bipolar inputs. The other two versions require bipolar inputs. All multipliers require an output amplifier summing junction available. All units can be converted for division or dual squaring or root operation with an external closing contact.

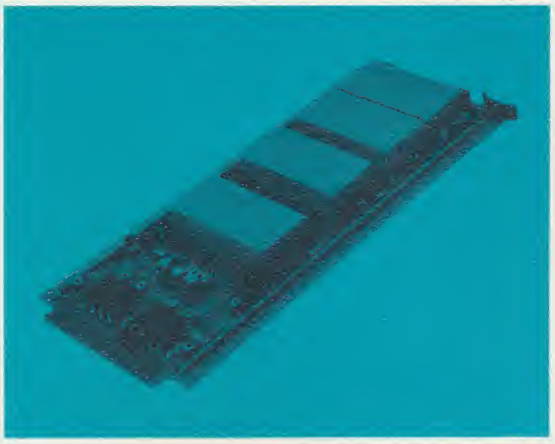

SPECIFICATIONS

	Model 502	Model 502A	Model 503
Input characteristics			
Variables	$\pm X, \pm Y$	$+X, +Y$	$\pm X, \pm Y$
Voltage range, peak	$\lvert X\rvert + \lvert Y\rvert \leq 200$ V	± 105 V	$\lvert X\rvert + \lvert Y\rvert \leq 200$ V
Impedance, min.	50 Kohm	50 Kohm	40 Kohm
Output characteristics			
Variable	$-XY/100$	$-XY/100$	$-XY/100$
Range (@ output of amp with 100 Kohm feedback resistor)	± 100 V	± 100 V	± 100 V
Maximum static errors			
$X=0, Y=0$	2 mv	2 mv	2 mv
$X=0, Y=\pm 100$ V or $Y=0, X=\pm 100$ V	20 mv	20 mv	10 mv
$X=\pm 100$ V, $Y=\pm 100$ V	50 mv	50 mv	25 mv
Dynamic error, total			
@ 100 Hz	100 mv, pk	100 mv, pk	100 mv, pk
@ 1,000 Hz	1 V, pk	1 V, pk	1 V, pk
Frequency response, full output –3 db point at input to output amplifier	60 KHz	60 KHz	60 KHz
Output noise, DC to 60 KHz	15 mv, pp	15 mv, pp	15 mv, pp
Number of adjustments	2	2	2
Temperature coefficient	2 mv/°F	2 mv/°F	2 mv/°C
Power required	± 100 V @ 15 ma	± 100 V @ 20 ma ± 130 V @ 10 ma	± 100 V @ 3 ma ± 130 V @ 26 ma



ZELTEX REPRESENTATIVES

1
INSTRUMENTS CONSULTANTS, INC.
Waban, Massachusetts 02168
P.O. Box 25
Phone: (617) 969-9881
Hamden, Connecticut
2381 Whitney Avenue
Phone: (203) 248-4174

2
DOOLITTLE ELECTRONICS CORP.
Fayetteville, New York 13066
P.O. Box 97
Phone: (315) 637-3222

3
HARVEY J. KRASNER ASSOCIATES, INC.
Great Neck, New York 11021
33 Great Neck Road
Phone: (516) 487-0690

4
DENCO
Philadelphia, Pennsylvania 19116
P.O. Box 11599
Phone: (215) 676-2525

5
TIBY CO.
Cleveland, Ohio
2245 Warrensville Center Rd.
Phone: (216) 371-5335
Detroit, Michigan
8701 Fenkell Avenue
Phone: (313) 834-9211
Dayton, Ohio
1954 N. Main Street
Phone: (513) 277-3822

6
L. G. WHITE & COMPANY, INC.
Silver Spring, Maryland 20910
880 Bonifant Street
Phone: (301) 585-3141
Winston-Salem, North Carolina
1020 Brookstown Avenue
P.O. Box 2356
Phone: (919) 725-3612

7
TECHNICAL MARKETING, INC.
Orlando, Florida
1511 E. Robinson Street
Phone: (305) 424-8531
Phone: (305) 647-6223
Greensboro, North Carolina
2218 Briarlea Road
Phone: (919) 274-2570
Huntsville, Alabama
P.O. Box 1001
Phone: (205) 534-2487
Largo, Florida
P.O. Box 344
Phone: (813) 446-6192

8
FIAT ENGINEERING ASSOCIATES
Bellwood, Illinois (Chicago)
5133 St. Charles Road
Phone: (312) 547-6200

9
TEXAS AVIONICS COMPANY
Dallas, Texas 75206
4515 Prentice Street
Phone: (214) 363-6324
Seabrook, Texas
1108 Meyer
Phone: (713) 474-3155

10
AZTEC ENTERPRISES, INC.
Albuquerque, New Mexico
5206B Constitution, N.E.
Phone: (505) 268-6421
Englewood, Colorado 80110
3385 So. Bannock, Suite 103
Phone: (303) 761-0101

11
N. R. SCHULTZ COMPANY
Seattle, Washington 98134
220 South Hudson Street
Phone: (206) 722-7800

12
WIELER & COMPANY
Downey, California
10842 S. Paramount Blvd.
Phone: (213) 773-5982
Los Altos, California
One First Street
Phone: (415) 948-7472
San Diego, California
Phone: (714) ZE 2-9047
Arizona
Phone: Enterprise 365

13
ELECTRONETIC SYSTEMS, LTD.
Downsview, Ontario
62 Alness Street
Phone: (416) 636-3673
Montreal 26, Quebec
6240 Victoria Ave., Suite 17
Phone: (514) 737-2744

14
CONTROLS & INSTRUMENTS OVERSEAS CORP.
New York, N.Y. 10016
15 East 40th Street
Phone: (212) 685-5178

15
NEOTRONIC INSTRUMENTS
62 Queensberry Street
Carlton, Victoria, Australia
Phone: (Melburne) 34-4641

16
TECHNICAL REPRESENTATIVES
Hazelwood, Missouri 63042
7049 Laupher Lane
Phone: (314) 521-1000
Wichita, Kansas 67218
247 South Pinecrest
Phone: (316) 628-4140

17
CONTACT FACTORY (Including Hawaii)

LITHO IN U.S.A.

BULLETIN NO. 1010A

Who offers quarter-square multipliers individually, in rack mount sub-systems, and in complete systems?

ZELTEX!

ONCE AGAIN, ZELTEX OFFERS AN ANALOG FIRST


Solid-state Quarter-Square Multipliers available as individual plug-in cards, in prewired card cages with internal power supplies, or in complete sub-systems with slavable reference supplies, programmable mode control and complete overload indication! And, the complete system readily plugs into any general purpose analog computer.

This new ZELTEX system shown below is a standard version of those already delivered to and working at NASA Langley. It represents the finest state-of-the art multiplier systems available today. Find out more.

ZELTEX, INC.
Concord, California
1000 Chalomar Road
Phone (415) 686-6660



A typical multiplier system containing 30 multipliers and 90 amplifiers, prewired and ready to plug in.

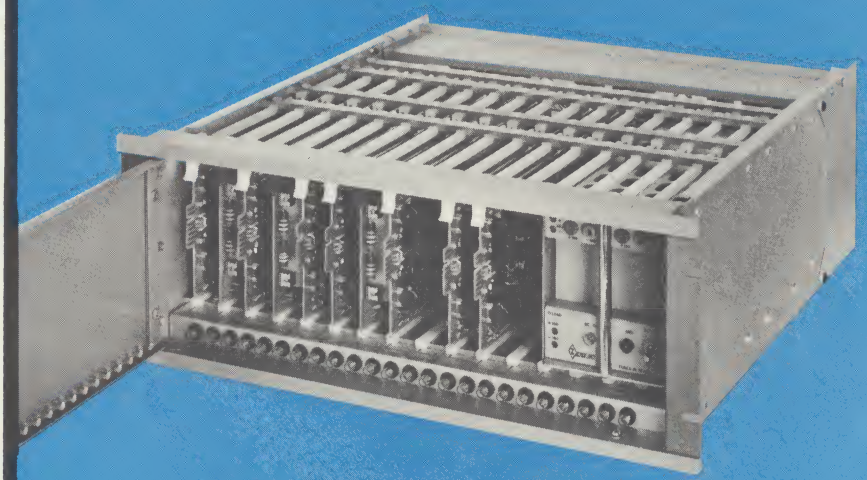

The ZELTEX multiplier cage typically accepts 8 multipliers and 8 amplifiers with all power internally furnished. Prewired or do-it-yourself.

KEY SPECIFICATIONS ARE:
±150 volt capability on both inputs
maximum static error < 25mv
maximum dynamic error < 100mv @ 100cps
bandwidth at full output > 40Kc

Ad No. ZL 616 — prepared by Sturges & Associates